

# SABRE SERIES

SABRE SLIMLINE LIGHT BAR RANGE



**SSS**  
SUPERIOR HEAT DISSIPATION

ANODISED POLYESTER POWDERCOAT

EASY INSTALLATION

UV/ SHOCK RESISTANT

ULTRA CLEAR LENS

6063 EXTRUDED ALUMINIUM HEAT SINK

3 YEAR WARRANTY \*ON LUMINAIRE


SIDE REFLECTIVE OPTICS

IP68 WATER RESISTANCE


CORROSION & RUST RESISTANT




**A** EVSS90LED (20.2")

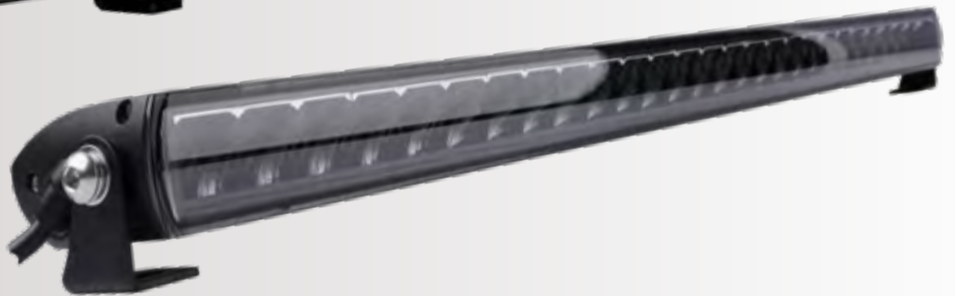

**B** EVSS135LED (29.8")

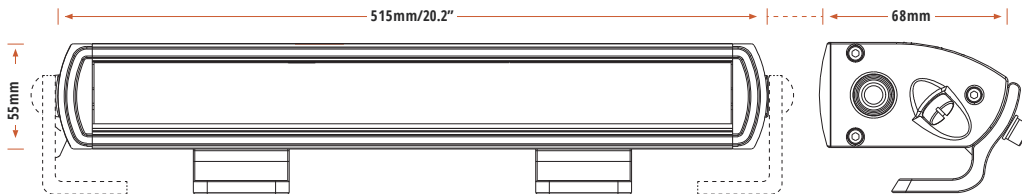

EVSS90LED (20.2")

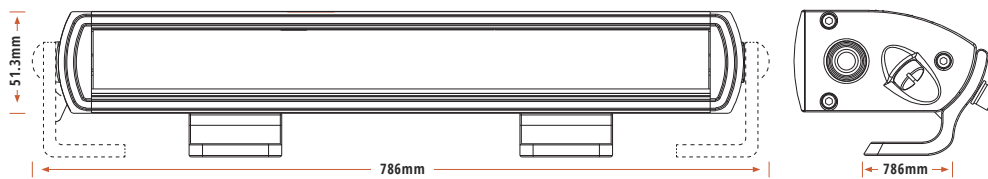

EVSS135LED (29.8")

\* SIZING WITH OPTIONAL SIDE BRACKET



# SABRE SERIES

SABRE SLIMLINE LIGHT BAR RANGE



EVSS90LED | 20.2"




EVSS135LED | 29.8"

**SPECIFICATIONS**

WATTAGE	90 WATT
LIGHT SOURCE	18 x 5W LG LEDS
LIGHT OUTPUT	8,100 LUMEN
VOLTAGE	9V-36V DC
OPERATING TEMP.	-40°C TO +60°C
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	1.13 KG
MOUNTING SUITABLE	UPRIGHT SIDE & BACK OPTIONS
WARRANTY	3 YEARS


**SINGLE SLIMLINE 90W LIGHT BAR**

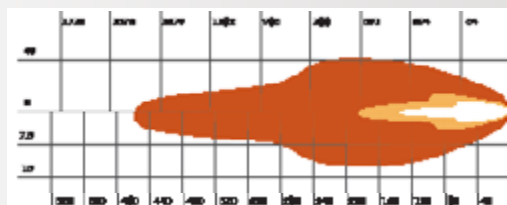

BEAM DRIVING SPOT  
 CODES EVSS90LED

WATTAGE	135 WATT
LIGHT SOURCE	27 x 5W LG LEDS
LIGHT OUTPUT	12,200 LUMEN
VOLTAGE	9V-36V DC
OPERATING TEMP.	-40°C TO +60°C
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	1.88 KG
MOUNTING SUITABLE	UPRIGHT SIDE & BACK OPTIONS
WARRANTY	3 YEARS

**SINGLE SLIMLINE 135W LIGHT BAR**

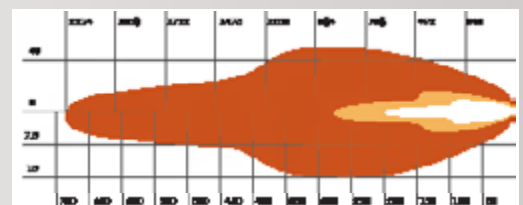

BEAM DRIVING SPOT  
 CODES EVSS135LED