

ANTARES SPORTS G2

SPORTS AREA FLOOD LIGHT - G2

TRUE ASYMMETRICAL BEAM

10 YR WARRANTY	67 IP RATING	07 IK RATING	70 CRI
-----------------------------	------------------------	------------------------	------------------



- Premium high-powered sports field lighting solution
- Specialised optics for Class I, II, III outdoor sports fields
- Available up to 237,600 luminous flux
- Brilliant control and consistency to Australian Standards for glare/light spill
- Excellent thermal performance
- 10 Year Warranty

IDEAL FOR HIGH MAST APPLICATION

- Outdoor & Indoor Stadiums
- Depots
- Large Plazas
- Building Façades
- Tennis Courts
- Heavy Industry
- Signage & Billboards

STOCK
Available*

*Selected Models




Light Source	Lumileds/Osram 5050	CRI	>70 (>80 Optional)
CCT	4000K (Optional 3000K, 5000K, 6500K)	Input Voltage	90-305VAC (347-480VAC optional)
Luminous efficacy (lm/W)	140	PF	> 0.90
LED Junction Temperature	≤75°C (@ Ta=25°C)	Electrical Class	Class I
Driver	Inventronics (Integral (60-600) / Remote Driver (800-1800)	Dimming Control	0-10V, DALI
IP Rating	IP67	Ambient Temp	-40°C to +55°C
Optical Cover	Tempered Glass	Body Material	Aluminium Heatsink, Stainless Bracket
Finish & Colour	Marine Grade Powder Coating: Grey	Lifespan	100,000 Hours
Accessories	Trunnion (Double NN) Bracket / Slip Fitter Shield Options: Fore/ Back/ Optical	Warranty	10 Year Warranty
Optics profiles	Asymmetric: 45°x145°, 70°x145°, 60°x90°, 60°x135° Ultra-asymmetric: 20°x125°, 25°x125°, 30°x95°, 60°x140°		


MODEL	Luminous flux (lm)	Dimensions (mm)	*1 Weight (Kg)
ETG-AFL300-G2	44,100	562 x 91 x 367	11.1
S ETG-AFL400-G2	62,600	663 x 91 x 367	12.3
ETG-AFL500-G2	71,200	584 x 672 x 116	21.5
ETG-AFL600-G2	88,200	584 x 672 x 116	22.2
ETG-AFL800-G2	125,300	584 x 672 x 116	*21.5
ETG-AFL1000-G2	142,400	788 x 583 x 116	*21.5
S ETG-AFL1200-G2	170,800	938 x 583 x 116	*25.3
ETG-AFL1500-G2	202,500	938 x 781 x 157	*34.8
ETG-AFL1800-G2	237,600	938 x 781 x 157	*34.8

*1 Excludes remote driver


DIMENSIONS 600W

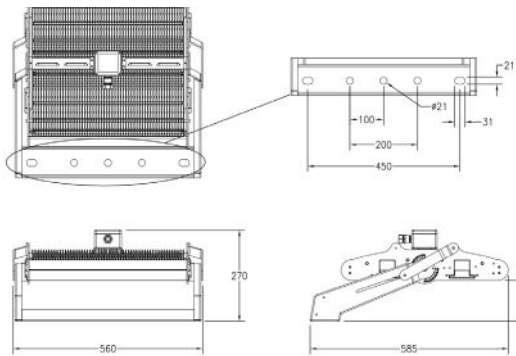

DIMENSIONS 800W

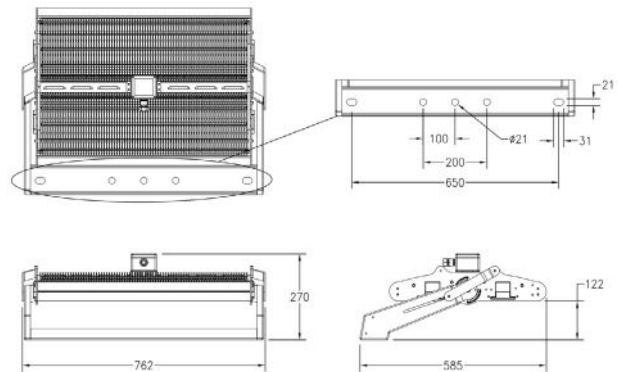

DIMENSIONS 1200W

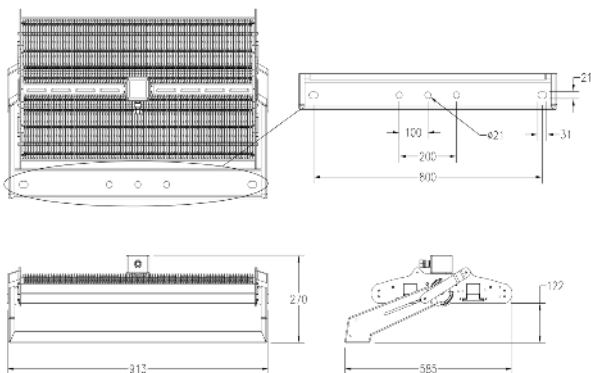

DIMENSIONS 1800W

