

# SOLAR SECURITY

## FLOOD LIGHT



### FEATURES


- » Six lighting modes for indoor or outdoor use
- » Adjustable bright lighting and timer for enhanced night lighting
- » LED Indicator shows three levels of power capacity
- » Illuminates 6 to 8+ nights, with or without full sunshine
- » Robust aluminium alloy, steel and glass construction
- » Temperature control (TCS) and adaptive lighting systems (ALS2.0)



### IDEAL FOR

Garden, Court yard, Park, Community Places, Public square, Plaza, Campus, Airfields, Commercial buildings, etc.

### DIMENSIONS

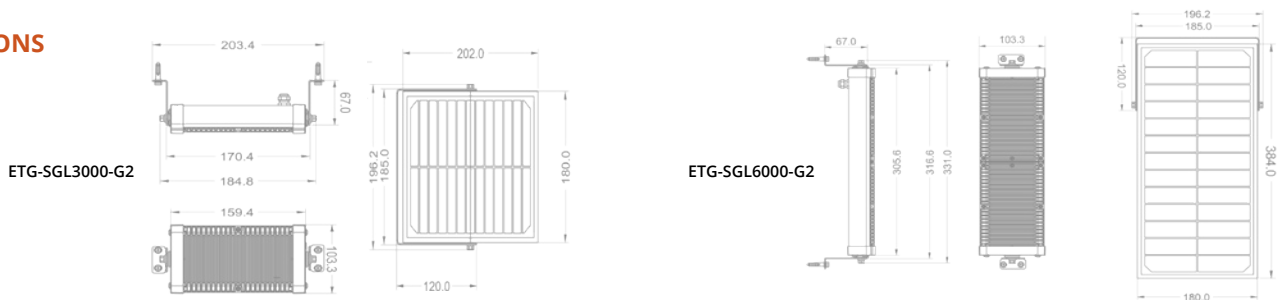

MODEL	ETG-SGL3000-G2	ETG-SGL6000-G2	
Lumen (lm)	3000	6000	
Solar Panel (W)	5	10	
Battery (V - Wh - AH)	3.7V 28.86Wh 2.6AH	3.7V 57.72Wh 2.6AH	
LED (Osram)	3030 30pcs	3030 60pcs	
Control Mode	Button switch, ON/OFF long press 1.5s		
Lighting Mode (RC)	M1: 50% (5hrs) + 10% till dawn   M2: 30% (5hrs) + 10% till dawn   M3: 20% till dawn   M4: 100% (2hrs) then off		
Indications	M1: Red   M2: Green   M3: Red   T: Flashing green		
Efficiency (lm/W)	190	Charging Time	7.5 hours
CCT (K)	5700	Lighting Time	>10 days
Charging	0 ~ 45°C	IP Rating	IP65
Discharging Temp	-20 ~ +60°C	Warranty	12 Months

The performance of this product may vary due to climate or seasonal factors that affect the available daylight hours or intensity of sunlight (ie. persistent cloudy or inclement weather). This product requires at least 6-8 hours of full sunlight, over 2-3 days when first installed to achieve full brightness. If this is not achieved, the product may produce substantially lower lux levels than specified, even when at 100% operation. Customers are advised to discuss this with their Earthtrack representative when selecting solar products for their site location.