

EMERGENCY FLOOD LIGHTING











The Sword Series offers the power of a 600mm length flood light, with emergency 3-hour battery backup. Available in a range of outputs, from 18-72 Watts, this Explosion proof light is compliant with Certifications and Ratings required by industrial clients.

5-year warranty

- Anti-glare lens and cover
- **High-efficiency LED** Driver suitable for harsh environments
- **High strength aluminium** alloy enclosure can endure 20J impact
- Mounting options: pole, wall, stanchion, clamp, ceiling & pendant options
- **Robust construction suitable** for saltwater and corrosive applications
- **Shock and vibration-resistant** tempered glass
- Surge Protection: 5KV













SWORD EMERGENCY FLOOD LIGHTING


Model - (EMERGENCY)	ETG-10ES059	ETG-10ES060	ETG-10ES061	ETG-10ES062	ETG-10ES063
Power (W)	18	36	60	80	100
Luminous (lm)	2457	4400	6800	8700	10000
Model - (Standard)	ETG-10SW054	ETG-10SW055	ETG-10SW056	ETG-10SW057	ETG-10SW058
Power (W)	18	36	48	56	72
Luminous (lm)	2457	4914	6552	7644	9828
Luminous (lm)	700				
Input Voltage (V) (Hz)	AC 220-240V - 50/60 Hz				
CCT(K)	4000k				
CRI	70 / 80				
Luminaire Efficacy	136.5lm/W				
Beam Types	120°				
PF	>0.98				
IP Rating	IP66				
Ambient Temperature TC	20°C ~ +55°C / T6				
Weight (kg)	7.3 (0.6m) 11.9 (1.2m)				
Battery Capacity	2.2 Ah				
Battery Type	Ni-Cd				
Surge Protection	5kV				
LED Driver	Over Voltage Protection / Short Circuit Protection				
Connecting Terminals	3*1.0-4mm² (L + N + PE)				
Available Cable Outer dia	Ø7- Ø14mm				
Cable Entries	2XNPT 3/4" (M20*1.5, M25*1.5 are optional)				
Earthing Protection	M4 (Internal and External Earth Bolts)				
Body	Alu Alloy, Temp.Glass, Epoxy Powder Coating, Fastner: SST,Enclosure Material: Cu FreeAluminium				
Warranty	5 years (50,000 hrs)				
Charging Time Backup	24 hours 180 min				
Battery Lifespan	500 cycles				





SWORD EMERGENCY FLOOD LIGHTING

18W - 36W - 48W

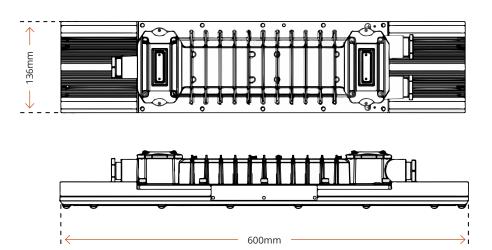



56W - 72W

